

## Pro3600SIE Remote Start Instructions

Congratulations on your purchase of a Boly Pro3600SIE with the campgen.com remote start option. The following instructions will detail the use of the remote start unit.

**Note** – Premium fuel is recommended for units equipped with the remote start.

**Note** – There is no warranty on batteries for units equipped with remote start as a failure to turn the remote start unit off can (will) drain and destroy the battery

### Manual Starting procedure:

The following procedure will guide you through starting the generator using either the key or the manual pull start. (WITHOUT REMOTE START)

1. Ensure the power switch for the remote start is set to the “Off” position (top black rocker switch)
2. Ensure the ECON switch is set to the “On” position. (You wouldn’t start your car and immediately stomp on the gas)
3. Pull the Choke handle and ensure it is fully extended.
4. Turn the key to the “On” position
5. Either pull the manual pull cord or turn the key to the start position (release when started) to start the unit.
6. Push the choke hand back in place and ensure it is fully depressed.
7. OPTIONAL – Turn the ECON throttle to the “Off” position if required (e.g. Starting AC)



Figure 1

## Remote Start:

To ensure all the features of the remote start function correctly, you must ensure the unit is properly configured.

1. Ensure the power switch for the remote start is set to the “ON” position (top black rocker switch)
2. Ensure the ECON switch is set to the “On” position. (IMPORTANT This switch will override the ECON function on the remote)
3. Ensure the key is in the “Off” position (IMPORTANT If set to the ON position the remote will not be able to power the generator down)

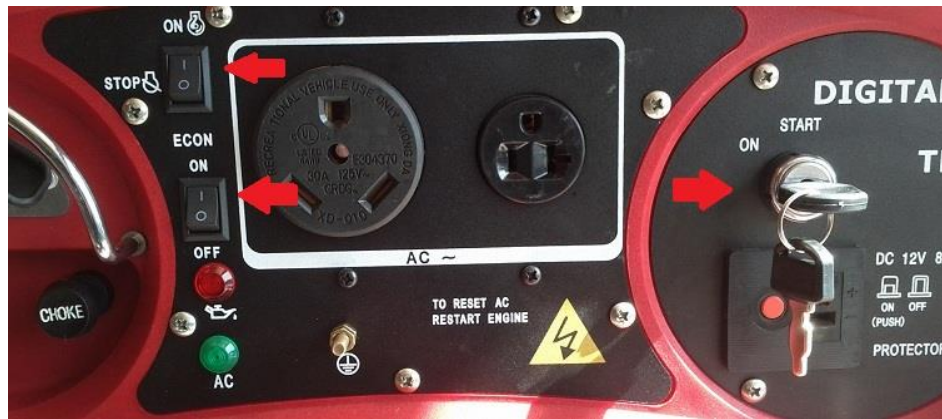


Figure 2

## Cold Start Procedure:

The cold start procedure should be used when the unit has not been running for 4 hours or more.

**Note** - The outside temperature does not matter, this mode should always be used if the unit has not been running for longer than 4 hours.

1. Locate one of the two remotes and pull the black plastic cover back to expose the buttons (if required)
2. Point the remote in the general direction of the generator and press the “A” button 3 times (a minimum of ½ second delay between button presses)
3. If the generator fails to start, repeat the procedure.



Figure 3

### Hot Start Procedure:

The hot start procedure should be used if the unit has been running within the last 4 hours. This procedure still applies operates the choke but for a much shorter duration.

1. Locate one of the two remotes and pull the black plastic cover back to expose the buttons (if required)
2. Point the remote in the general direction of the generator and press the “B” button 3 times (a minimum of ½ second delay between button presses)
3. If the generator fails to start, repeat the procedure.



Figure 4

### Remote Shutdown Procedure:

The campgen.com remote start unit is also equipped with a remote shutoff feature.

1. Point the remote in the general direction of the generator and press the “D” button
2. The generator should immediately power down
3. Wait 1 minute before attempting to restart the generator.



Figure 5

### **ECON Throttle Procedure:**

The campgen.com remote start unit is equipped with an ECON throttle control. This feature is very handy when you need to start your AC as you no longer have to leave your trailer to adjust the ECON throttle.

1. Ensure the generator is running.
2. Locate one of the two remotes and pull the black plastic cover back to expose the buttons (if required)
3. Point the remote in the general direction of the generator and press the “C” button 1 time. You should here the RPM of the generator increase.
4. To turn the ECON throttle back off, simply point the remote in the general direction of the generator and press the “C” button again.



Figure 6

**Note** – If the generator RPM does not change, check the ECON switch on the front of the generator. Ensure the switch is set to the “ON” position.

**ENSURE REMOTE UNIT IS TURNED OFF  
WHEN GENERATOR NOT IN USE**